

Rec'd PCT/PTO 29 DEC 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
20 January 2005 (20.01.2005)

PCT

(10) International Publication Number  
**WO 2005/006520 A1**

(51) International Patent Classification<sup>7</sup>: **H02K 21/46**,  
1/27, F04B 39/02

(21) International Application Number:  
PCT/JP2004/005541

(22) International Filing Date: 19 April 2004 (19.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2003-194218 9 July 2003 (09.07.2003) JP  
2003-353461 14 October 2003 (14.10.2003) JP

(71) Applicant (for all designated States except US): MAT-  
SUSHITA ELECTRIC INDUSTRIAL CO. LTD.  
[JP/JP]; 1006, Oaza Kadoma, Kadoma-shi, Osaka,  
5718501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): IIDA, Keizo; 1006,  
Oaza Kadoma, Kadoma-shi, Osaka, 5718501.

(74) Agents: IWAHASHI, Fumio et al.; c/o Matsushita Elec-  
tric Industrial Co., Ltd., 1006, Oaza Kadoma, Kadoma-shi,  
Osaka, 5718501 (JP).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: SYNCHRONOUS INDUCTION MOTOR AND ELECTRIC HERMETIC COMPRESSOR USING THE SAME

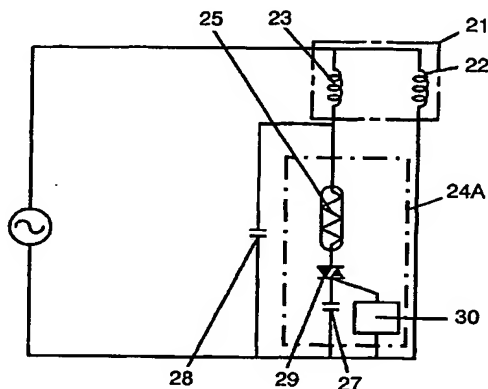

(57) Abstract: A synchronous induction motor has a stator having a main winding and an auxiliary winding; a rotor having a yoke, a permanent magnet embedded in the yoke and a secondary conductor provided in the vicinity of periphery of the yoke; and a starter. The starter has a starting capacitor connected in series with the auxiliary winding of the synchronous induction motor, and a switching unit to open/ close a circuit from the starting capacitor to the auxiliary winding. The switching unit closes the circuit from the starting capacitor to the auxiliary winding when the synchronous induction motor is at rest, and opens the circuit after the synchronous induction motor is started. The synchronous induction motor is highly efficient and easy to re-start with low power consumption. The electric hermetic compressor equipped with the synchronous induction motor can perform with the similar effects.

WO 2005/006520 A1